



IZOLON

IZOFIBRE FR TYPE THD

FLAT EXPANDED POLYSTYRENE
INSULATION BOARD

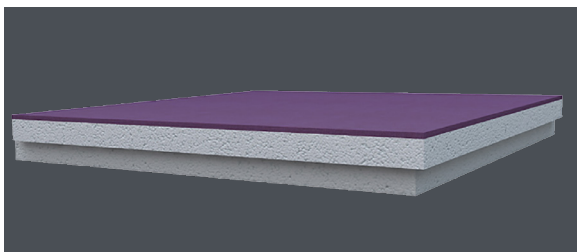

COMPLEMENTARY PRODUCTS



PHYSICAL PROPERTIES

THD (type 3) Expanded Polystyrene

Thermal Resistance (ASTM C518 C177) Thickness of 25 mm (1")	RSI-0.74 R-4.2
Vapour Permeability (ASTM E96) Thickness of 25 mm (1")	2.25 perm 130 ng/Pa·s·m ²
Compressive Strength (ASTM D1621) Thickness of 38 mm (1 1/2")	210 kPa 30.6 lbs/in ²
Flexural Strength (ASTM C518 C203) Thickness of 38 mm (1 1/2")	300 kPa 43.71 lbs/in ²
Water Absorption (ASTM D2842) Thickness of 38 mm (1 1/2")	2%
Density (ASTM D1621)	32.03 kg/m³ 2 lbs/ft ³
Limiting Oxygen Index (ULC S-701) % minimum	24%
Dimension Stability (ASTM D2126) % max. of linear change	1.5%

DESCRIPTION

Tapered expanded polystyrene insulation board, factory laminated with hot bitumen to a 12.7 mm (1/2") natural fiberboard, square-end cut, designed to insulate flat or low slope roofs.

CERTIFICATIONS



**MAÎTRES
COUVRESSEURS**
Association des
Maîtres Couvresseurs
du Québec



LEED

INSTALLATION

1. If adhered with adhesive, refer to the technical data sheet of the adhesive used for application recommendations.
2. Place the panels in close contact, in parallel rows and without deformation or empty space, as indicated in the shop drawing.
3. Fill joints more than 5 mm (3/16").
4. If mechanically attached, use the appropriate LEXCOR LEXGRIP screws and plates. Follow FM recommendations for the number of mechanical fasteners to be used per panel.

ADVANTAGES

Fast Installation

One step is saved on site since the insulation panel is already laminated to the cover board.

Low Water Absorption

The closed cell walls are waterproof and as such, water can only penetrate in channels located between polystyrene cells that are held together.

High-Dimensional Stability

According to industry standards, EPS is one of the leaders in terms of size maintenance. This helps the system to remain fully waterproof at all times.

Captive Gas; 98% Air and 2% Plastic

This formula has been used for more than 50 years. It does not contain any VOC, CFC's, HCFC's, Formaldehyde or any gas that can impact the ozone layer. Furthermore, this provides the product with premium features including its light weight and the maintenance of R-Value.

Meets High Standards

Helps to reach Novoclimat (in Quebec if applicable), EnergyStar (Ontario and the Maritimes) and R-2000 (Canada) insulation levels.

Continued on back

IZOFIBRE FR

TYPE THD

FLAT EXPANDED POLYSTYRENE INSULATION BOARD

PHYSICAL PROPERTIES	
Fire Resistance Fiberboard Panel	
Thermal Resistance (ASTM C518 C177) Thickness of 12.5 mm (1/2")	RSI-0.27 R-1.55
Linear Expansion (ASTM C209)	0.10%
Compressive Strength (ASTM C165) 10% Deformation 25% Deformation	34.8 lbs/in ² 51 lbs/in ²
Transversal Breaking Strength (ASTM C209)	40 N
Water Absorption (ASTM C209)	3.5%
Density (Volumetric Mass) (ASTM D 1621)	232 kg/m³ 14.5 lb/ft ³
Tensile Strength (ASTM C209) Perpendicular to the surface (min) Parallel to the surface	36,5 kPa / 761 lbs/pi ³ 1,3 MPa / 187 lbs/po ³
Flame Spread (ULC S-102 / ULC S-102.2)	< 25
Smoke Development (ULC S-102 / ULC S-102.2)	< 30
SIZES	
Width x Length*	1219 mm x 1219 mm 48" x 48"
Thickness	51 mm to 305 mm 2" to 12"
Shiplap	16 mm 5/8"
Number of Panels per Skid	Varies according to thickness
*Other sizes available on special order	



PRODUCT WARRANTY

Thermal Value is 100% Guaranteed

The thermal resistance of the product is 100% guaranteed free of charge for a period of at least 40 years.

