




Notes : FM requires fastener row spacing in perimeter areas to be a maximum of 3' (915mm) when running parallel to steel ddeck flutes.

Valid only up to FM 1-90. Use Alternative 2 for projects exceeding FM 1-90.

10' wide rolls should have one fastener every 12.0"
12' wide rolls should have one fastener every 6.0"

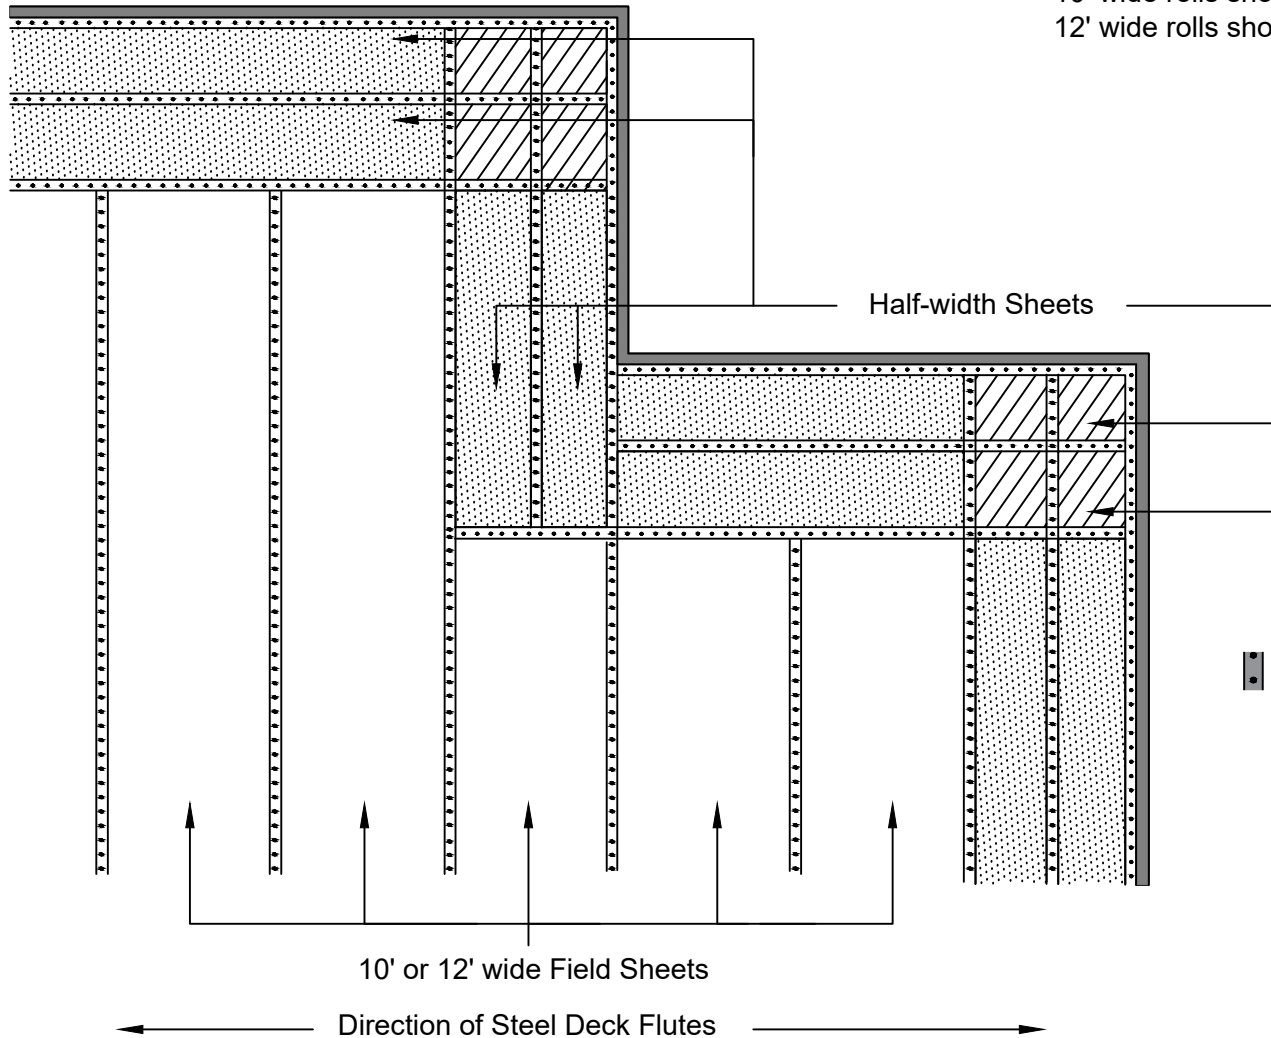

FM defined Perimeter Area*

FM defined Corner Area

* : The lesser of 0.1 times the building's lesser plan dimension or 0.4 times the eave height, subject to a minimum width of 4' (1.2m).

Fastening under Reinforced Strip** or P.S. Coverstrip***

** : Heat welded on all sides

*** : Applied with Primer

Third option = Cut the sheets to size and attachments in the seam.