



EXAMPLE

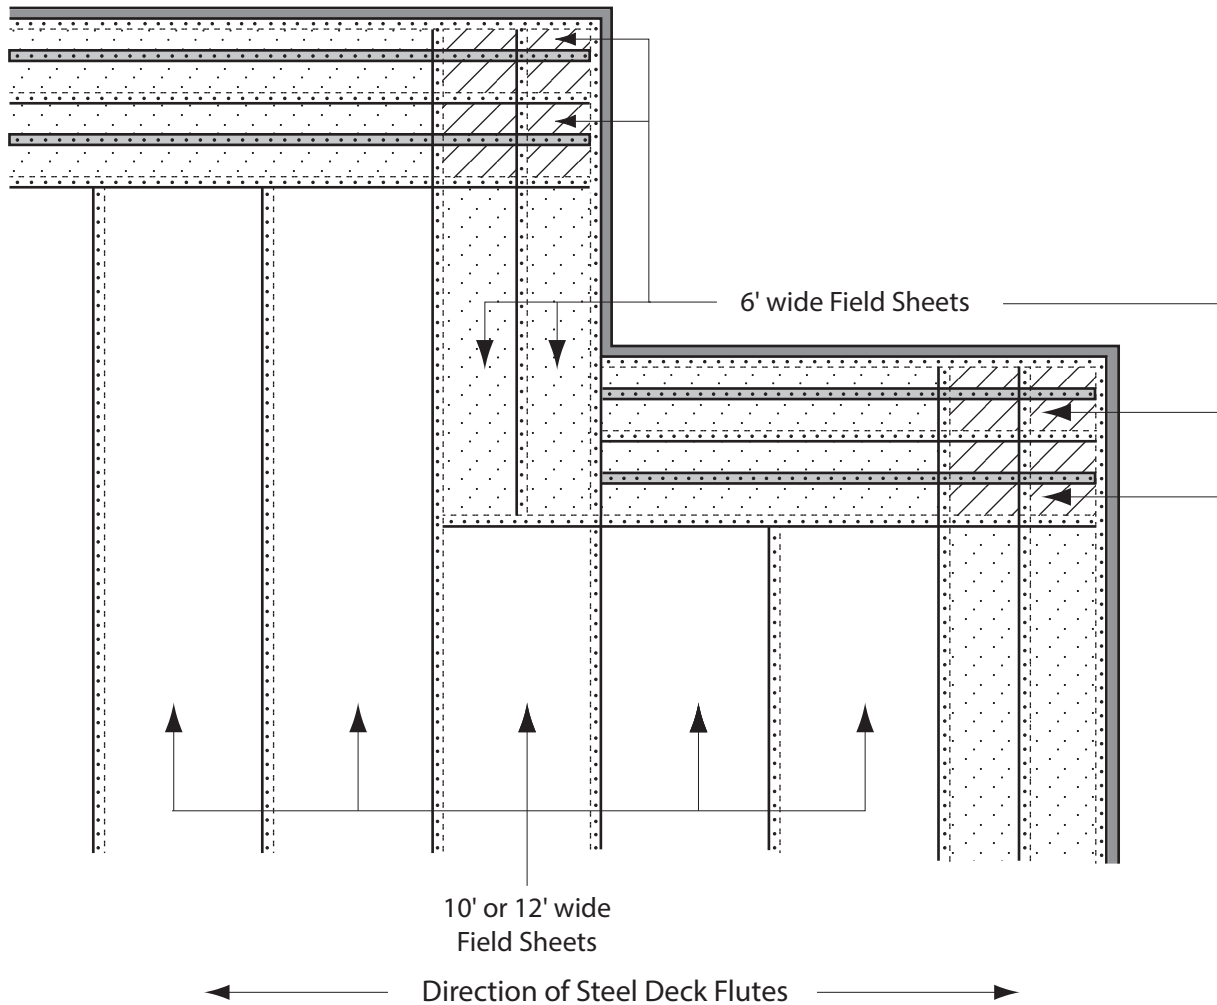

Notes:

FM requires fastener row spacing in perimeter areas to be a maximum of 3' (915mm) when running parallel to steel deck flutes. Valid only up to FM 1-90. Use Alternative 2 for projects exceeding FM 1-90.

 FM defined Perimeter Area [‡]

 FM defined Corner Area

 Fastening within Field Seam (Detail H-E-011)

 Fastening under Reinforced Strip* or P.S. Coverstrip ⁺

*: Heat welded on all sides ⁺: Applied with Primer.

[‡]: The lesser of 0.1 times the building's lesser plan dimension or 0.4 times the eave height, subject to a minimum width of 4' (1.2m).



FM Fastening using 10' or 12' Hi-Pro PVC Field Sheets
Alternative 1: Picture Frame Format
Roofing System Detail

Scale: Not to scale

Date: August, 2016

Detail No.: P-E-015