


# CAUTION STRIP

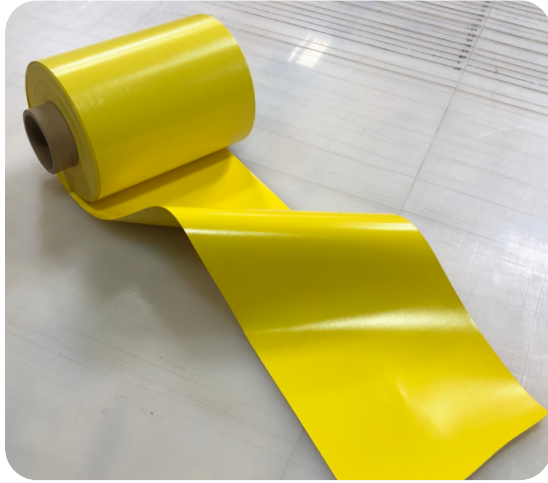

## FiberTite Roof Perimeter Caution Strip

### Product Data

FiberTite® Roof Perimeter Caution Strip provides a highly visible warning for service personnel.

#### DESCRIPTION

FiberTite Roof Perimeter Caution Strip is available in rolls measuring either 5-in or 10-in by 100-ft. The strips are designed to provide a highly visible warning to service personnel that they are nearing the most hazardous area of the roof: the roof edge.

The caution strip is constructed of a knitted 7.5 oz/yd. polyester fabric, coated with a pigment rich “safety yellow” thermoplastic PVC compound. The durability of the caution strip is further enhanced with a proprietary acrylic-urethane top finish to resist UV, improve color fastness and heighten overall visibility by repelling dirt.

#### APPLICATION

The caution stripping is compatible with all vinyl based roof membrane systems and can be welded directly to the thermoplastic vinyl membrane roofing with conventional hot air welding equipment and techniques.

#### PHYSICAL PROPERTIES

Perimeter Caution Strip	Type Weight	Polyester 7.5 oz/yd <sup>2</sup>
Thickness	ASTM D751	30 mil.
Tongue Tear	ASTM D751	275 lbf
Grab Tensile	ASTM D751	700 lbf
Adhesion	ASTM D751	10 lbf/in
Low Temp.	ASTM D2136	Pass -40°F
Flame Resistance	UL 214	2 second flameout

These specifications are current as of the date of printing. Revisions or additions may be issued periodically. For a listing, presentation, and download of the most recent data, visit:

[www.FiberTite.com/document-library/product-data-sheets](http://www.FiberTite.com/document-library/product-data-sheets)



For more information on FiberTite Systems and accessories please call: Seaman Corporation (800) 927-8578  
International 1+ (330) 262-1111

[FiberTite.com](http://FiberTite.com)

FiberTite® is a registered trademark of Seaman Corporation.

